


SLS34-GL24 & SLS34-GL28 34mm Glazed-In Louvres (For 24mm and 28mm Glazing)

The Viva Glazed-in Wall Louvre uses 34mm louvres to cater for either 24mm or 28mm thick glazing panels

To ensure long life, all parts are manufactured with high grade aluminium extrusions and a 10 year colour fastness is offered with all paint finishes

More details are given in the Technical Specification below, but if you require further information, please contact us

Type	Glazed-in Louvre using a blade Pitch of 34mm	
Material	Aluminium	All parts (frame profile, clips, blades etc) are manufactured from aluminium extrusions AIMg Si 0.5
	Finish	Natural anodising to 15-22µm with Powder Coating available in any RAL or BS colour
	Protection	Nylon insect mesh fitted as standard with Stainless Steel or Gas meshes also available
Design	<p>100% Aluminium construction</p> <p>1.5mm aluminium panels can also be fitted instead of insect meshes</p> <p>Reinforcement profile carrying extra blade supports are fitted when louvre widths > 700mm</p> <p>Aluminium foil covered insulation packs in any required thickness can be bonded to the back of panels</p> <p>Aluminium water drainage profile can be fitted at the bottom of the louvre to improve water tightness</p> <p>Glazing Features:</p> <p>Glazing Thickness = 24 mm or 28 mm (Specify when Ordering)</p> <p>Blade Pitch = 34 mm</p> <p>Blade Height = 39 mm</p> <p>Rebate Size = 18 mm</p> <p>Visual Free Area = 68%</p>	
Fixing	<p>With Glazing Beads</p> <p>The Use of Glazing Blocks is recommended</p>	
Manufacture	Custom made to measure by our skilled craftsmen to our exact requirements	
Powder Coating	<p>Powder Coating Thickness = 60-80 µm</p> <p>Any RAL or BS Colour available</p> <p>10 Year guarantee on colour fastness (Qualicoat)</p>	

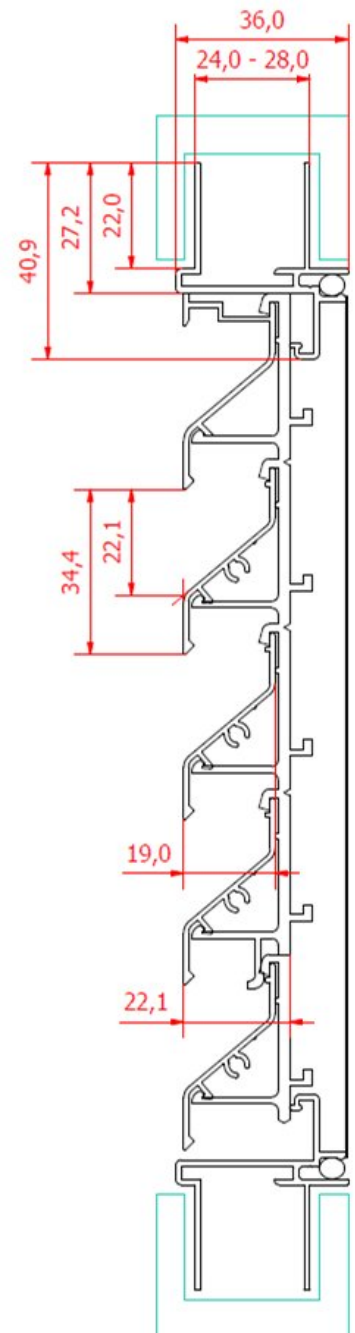

ISO9001:2008
Certificate No. FM547243

VIVA G&S Ltd

Unit 1, 219 Torrington Avenue, Coventry CV4 9HN

Tel: 02476 694500

Website: www.viva-group.co.uk

Fax: 02476 474333

Email: enquiries@viva-group.co.uk